

EE-PCA

Product Configuration Adapter

The EE-PCA is an adapter kit used to connect E+E measurement devices to a personal computer. Together with the free Product Configuration Software EE-PCS, the Product Configuration Adapter enables setup and configuration of various E+E sensors.

The EE-PCA and EE-PCS functionality depends on the E+E measurement device and may include:

- View actual measured data
- Selection of physical quantities and measurement units at the outputs
- Output scaling
- Offset 1 or 2 point adjustment
- Settings of alarm outputs
- Display settings
- Digital communication settings



The scope of supply includes the converter unit, USB and RS232 connection cables and an additional power adapter.

Setup


Connection to PC

EE-PCA can be connected to a PC via either USB or RS232 cable.

- For RS232, the EE-PCA shall be powered with the adapter in the scope of supply.
- For connection to an USB port, the power adapter is not necessary.

Connection to E+E device

The connection cable is device specific. It is not included in the scope of supply and shall be ordered separately.

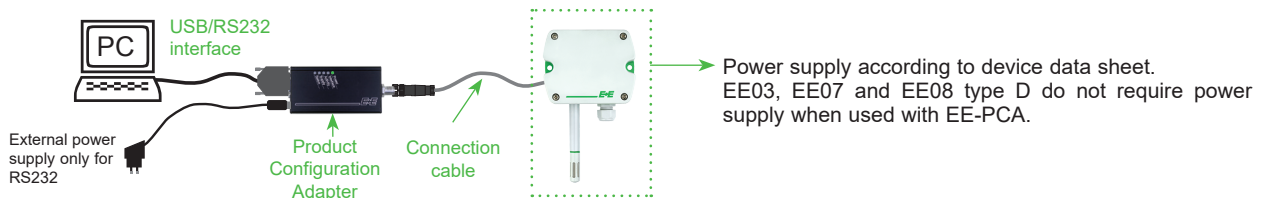

Ordering Guide

| POSITION 1 | PRODUCT CONFIGURATION ADAPTER | EE-PCA |
|------------|---|----------|
| POSITION 2 | CONNECTION CABLE (choose according to device) | |
| | EE33, EE371, EE381 | HA011063 |
| | EE03 (only display of measured values) | HA011056 |
| | EE07 | HA011057 |
| | EE08 type D | HA011060 |
| | EE160 with analogue output | HA011059 |
| | EE671 with analogue output | HA011064 |
| | EE150, EE4x1 with analogue output | HA011065 |
| | EE300Ex, EE100Ex | HA011068 |

Order Example

Position 1: **EE-PCA**
 E+E Product Configuration Adapter

Position 2: **HA011059**
 Cable for EE160 with analogue output

Accessories

EE-PCS **free download** at www.epluse.com/configurator
 Power supply adapter **V03** (see data sheet „Accessories“)