

# EE-PCA

## Product Configuration Adapter

The EE-PCA is an adapter set used to connect E+E measurement devices to a personal computer. Together with the free Product Configuration Software EE-PCS, the Product Configuration Adapter enables setup and configuration of various E+E transmitters and probes.

The EE-PCA and EE-PCS functionality depends on the E+E measurement device and may include:

- View actual measured data
- Selection of physical quantities and measurement units at the outputs
- Output scaling
- Offset 1 or 2 point adjustment
- Settings of alarm outputs
- Display settings
- Digital communication settings



The scope of supply includes the converter unit, USB and RS232 connection cables and an additional power adapter.

### Setup


#### Connection to PC

EE-PCA can be connected to a PC via either USB or RS232 cable.

- For RS232, the EE-PCA shall be powered with the adapter in the scope of supply.
- For connection to an USB port, the power adapter is not necessary.

#### Connection to E+E device

The connection cable is device specific. It is not included in the scope of supply and shall be ordered separately.

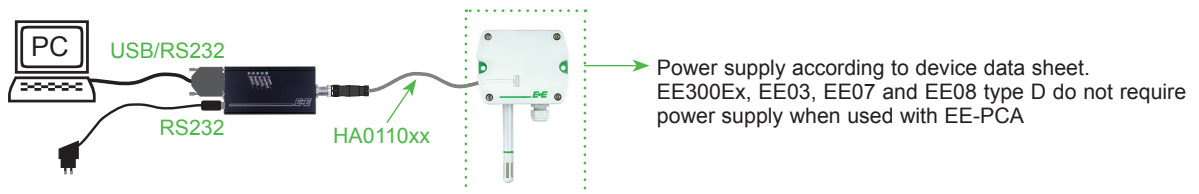

### Ordering Guide

POSITION 1	PRODUCT CONFIGURATION ADAPTER	EE-PCA
POSITION 2	<b>CABLE</b> (choose according to device)	
	EE33, EE35, EE37x, EE38x	HA011063
	EE300Ex	HA011061
	EE03 (only display of measured values)	HA011056
	EE07	HA011057
	EE08 type D	HA011060
	EE160 analogue	HA011059
	EE210, EE211, EE160 digital, EE650, EE660, EE820, EE850	HA011062
	EE65, EE66	HA011058
	EE671 converter set	HA011064
	EE150, EE4x1 with analogue output	HA011065

### Order Example

Position 1: **EE-PCA**  
 E+E Product Configuration Adapter

Position 2: **HA011061**  
 Cable for EE300EX

### Accessories

EE-PCS **free download** at [www.epluse.com/configurator](http://www.epluse.com/configurator)  
 Power supply adapter **V03** (see data sheet „Accessories“)